

TYPE:

LED STRIPES
4.07

LinkS_{300P}

LED stripe with 300 diodes per 5m roll and IP65 protection. Can be divided into 50mm sections.




LinkS_{300P} is a stripe with 300 diodes per 5m roll. Thanks to the IP65 protection, these stripes are suitable for outdoor use. It is perfect for illuminating light boxes, POS systems, furniture and interior elements. Double-sided 3M™ industrial adhesive tape on the back is used for assembly. The LinkS_{300P} stripes are powered by 12 VDC and have a 2 year warranty.

TECHNICAL DATA

Type	LinkS _{300P} W8K	LinkS _{300P} W6K	LinkS _{300P} W4,3K	LinkS _{300P} W3K	LinkS _{300P} R	LinkS _{300P} G	LinkS _{300P} B
Color	white	white	white	white	Red	Green	Blue
Voltage [VDC]	12	12	12	12	12	12	12
Current [mA / 1m]	340 ~ 400	340 ~ 400	340 ~ 400	340 ~ 400	340 ~ 400	340 ~ 400	340 ~ 400
Power consumption [W]	4,8 (±5%)	4,8 (±5%)	4,8 (±5%)	4,8 (±5%)	4,8 (±5%)	4,8 (±5%)	4,8 (±5%)
Luminous flux [lm]	400 (±5%)	400 (±5%)	400 (±5%)	400 (±5%)	-	-	-
Light output [lm / W]	83	83	83	83	-	-	-
Beam angle [°]	120	120	120	120	120	120	120
Degree of protection	IP65	IP65	IP65	IP65	IP65	IP65	IP65
Color temperature [K]	8000 (±5%)	6000 (±5%)	4300 (±5%)	3000 (±5%)	-	-	-
Wavelength [µm]	-	-	-	-	620	520	460
Operating temperature [°C]	-10 - +40	-10 - +40	-10 - +40	-10 - +40	-10 - +40	-10 - +40	-10 - +40
LEDs	SMD3528	SMD3528	SMD3528	SMD3528	SMD3528	SMD3528	SMD3528
LED quantity per 1m [pcs.]	60	60	60	60	60	60	60
Partial [cm]	5	5	5	5	5	5	5
Lifetime [h]	30.000	30.000	30.000	30.000	30.000	30.000	30.000
Warranty [months]	24	24	24	24	24	24	24
Packing [m]	5	5	5	5	5	5	5


www.ledlink.de

DIMENSIONS [mm]

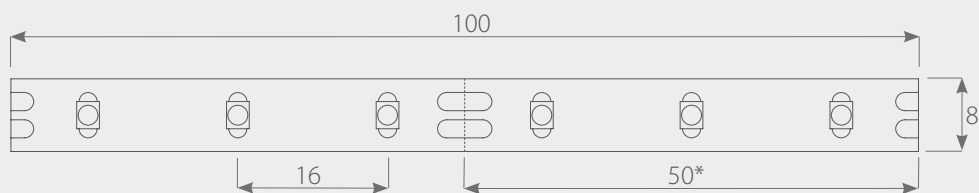

* Dimension of the section

CONSTRUCTION

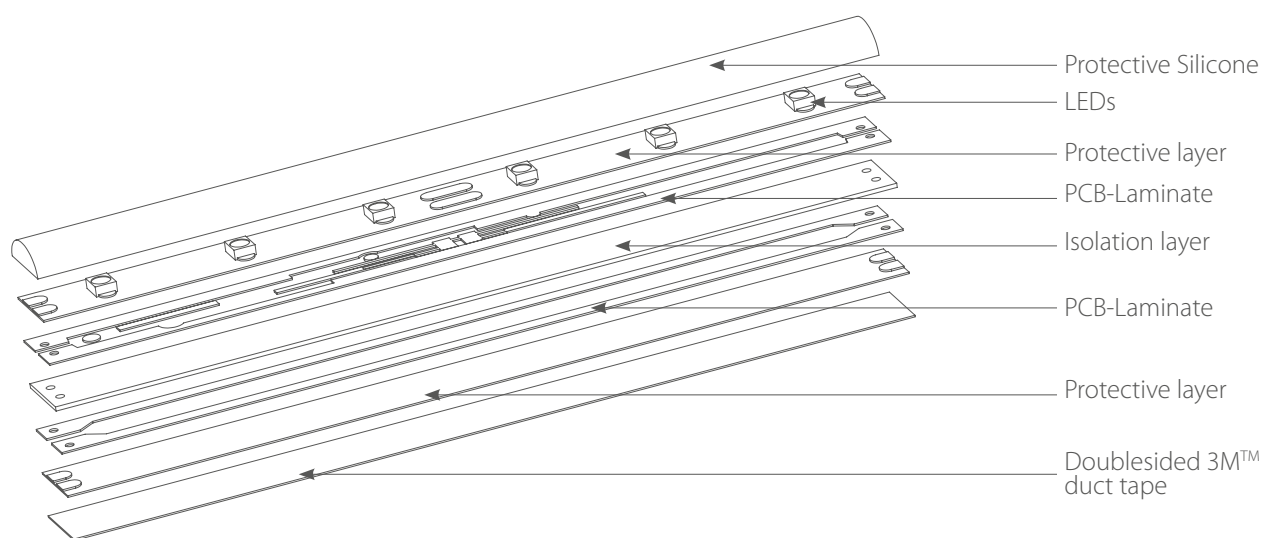

There may be max. 5 m of stripe connected in series.

TABLE OF CONTENTS 