

TYP:

LED STRIPES

LinkS₃₀₀ RGBW CCT

Typical applications: edge lighting in industry advertising |
small spatial letters



12 mm width

RGB + WW/CW


double-sided 3M VHB™ tape



ADVERTISING
SOLUTIONS



CUSTOM
APPLICATIONS




ARCHITECTURAL
BACKLIGHT



LinkS₃₀₀ RGBW CCT is a stripe with 300 diodes per 5m roll. It is excellent for very light lighting of light boxes, POS systems, furniture and elements of interior design. A separate RGBW CCT controller is required for proper operation. For larger projects an RGBW CCT amplifier must be added. Double-sided 3M™ industrial adhesive tape on the back is used for assembly. The LinkS₃₀₀ RGBW CCT stripes are powered by 12 VDC and have a 3 year warranty.

DIMENSION [mm]

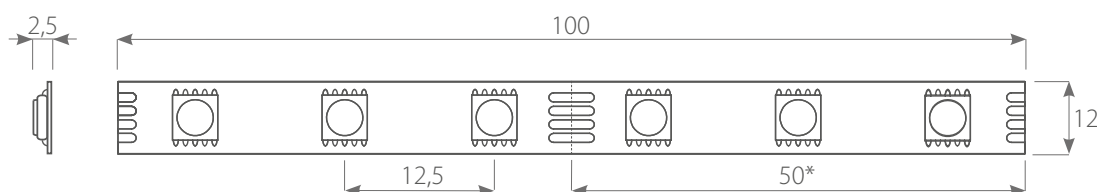


LEDlink

www.ledlink.pl

* dimension of the cutting
section

Type	LinkS ₃₀₀
	RGBW W2560K CCT
Symbol	T120440
Color	RGB + W2500-6000K
Voltage [V DC]	12
Current [mA/1m]	1400 ~ 1600
Power consumption [W]	19,2 (±5%)
Luminous flux [lm]	-
Light output [lm/W]	-
Beam angle [°]	120
Protection degree	IP20
Color temperature [K]	2500-6000
Wavelength [µm]	R: 620 / G: 520 / B: 460
Operating temperature [°C]	-10 - +40
LEDs	SMD5050
LED quantity [pcs./m]	60
Partial [cm]	5
Lifetime [h]	30.000
Warranty [months]	36
Packing [m]	5

CONSTRUCTION

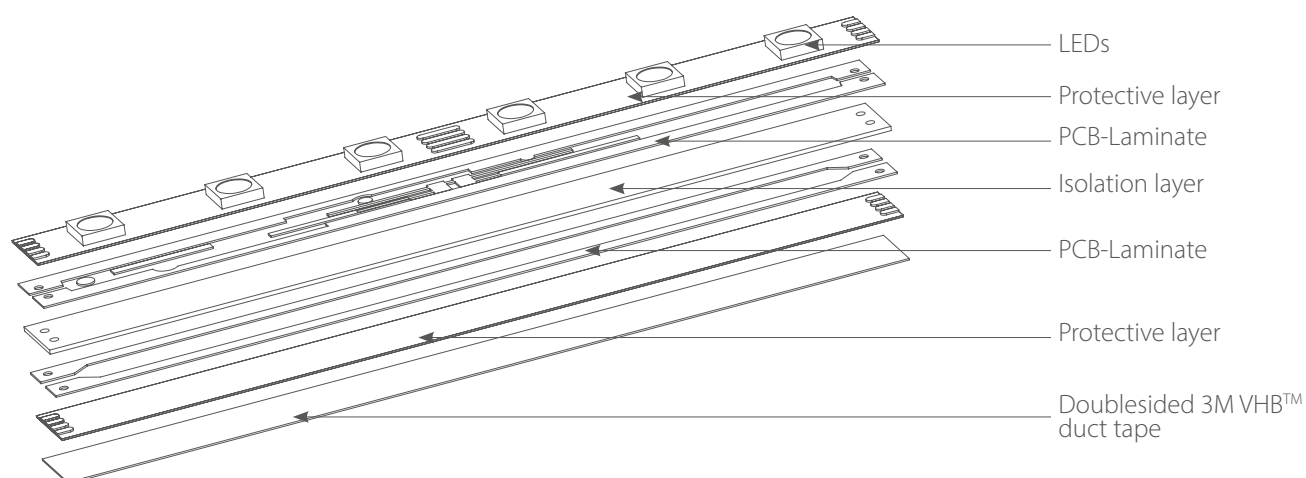

Supply method: The maximum length of the section fed in series is 5m.

On request, possible sections: 30m or 50m

TABLE OF CONTENTS 