

TYP:

LED STRIPES

LinkS₃₀₀


Typical applications: edge lighting in industry advertising |
small spatial letters



ADVERTISING
SOLUTIONS



CUSTOM
APPLICATIONS




ARCHITECTURAL
BACKLIGHT



LinkS₃₀₀ is a professional stripe with 300 diodes per 5m roll. It is ideally suited for illuminating light boxes, POS systems, furniture and interior elements. Double-sided 3M VHB™ industrial adhesive tape on the back is used for assembly. The LinkS₃₀₀ stripes are powered by a 12 VDC power supply and have a 3 year warranty.

DIMENSION [mm]

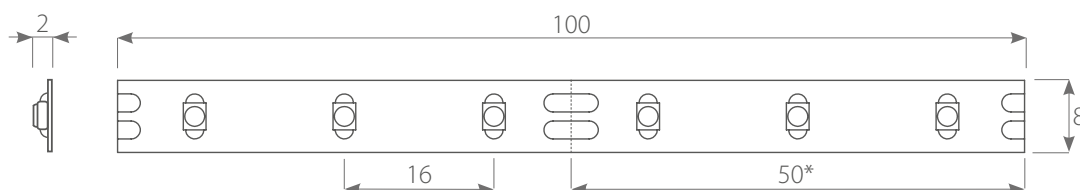

LEDlink


www.ledlink.pl

* dimension of the cutting
section

Type	LinkS ₃₀₀						
	W80K	W60K	W40K	W30K	R	G	B
Symbol	T1202003	T1201603	T1201303	T1201103	T1203003	T1203103	T1203203
Color	white	white	white	white	red	green	blue
Voltage [V DC]	12	12	12	12	12	12	12
Current [mA/1m]	340 ~ 400	340 ~ 400	340 ~ 400	340 ~ 400	340 ~ 400	340 ~ 400	340 ~ 400
Power consumption [W]	4,8	4,8	4,8	4,8	4,8	4,8	4,8
Luminous flux [lm]	400	400	400	400	-	-	-
Light output [lm/W]	83	83	83	83	-	-	-
Beam angle [°]	120	120	120	120	120	120	120
Protection degree	IP20	IP20	IP20	IP20	IP20	IP20	IP20
Color temperature [K]	8000	6000	4000	3000	-	-	-
Wavelength [µm]	-	-	-	-	620	520	460
Operating temperature [°C]	-10 - +40	-10 - +40	-10 - +40	-10 - +40	-10 - +40	-10 - +40	-10 - +40
LEDs	SMD2835	SMD2835	SMD2835	SMD2835	SMD2835	SMD2835	SMD2835
LED quantity [pcs./m]	120	120	120	120	120	120	120
Partial [cm]	5	5	5	5	5	5	5
Lifetime [h]	30.000	30.000	30.000	30.000	30.000	30.000	30.000
Warranty [months]	36	36	36	36	36	36	36
Packing [m]	5	5	5	5	5	5	5

*option available on request: LinkS₃₀₀ Y (yellow - 590 µm) - T1203303

CONSTRUCTION

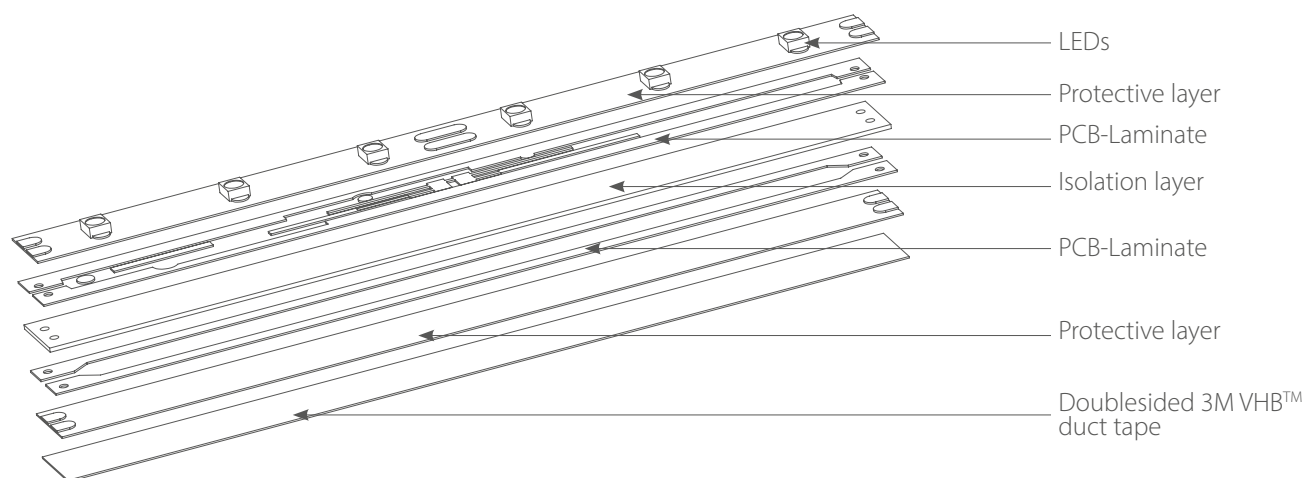

Supply method: The maximum length of the section fed in series is 5m.

On request, possible sections: 30m or 50m

TABLE OF CONTENTS 