

LEDlink

LinkS300

LED STRIPES

8 mm width
efficiency 83lm/W
double-sided 3M VHB™ tape



FURNITURE
BACKLIGHT



ARCHITECTURAL
BACKLIGHT



ADVERTISING
SOLUTIONS




CUSTOM
APPLICATIONS

Typical applications: edge lighting in industry advertising | small spatial letters

LinkS₃₀₀ is a professional stripe with 300 diodes per 5m roll. It is ideally suited for illuminating light boxes, POS systems, furniture and interior elements. Double-sided 3M VHB™ industrial adhesive tape on the back is used for assembly. The LinkS₃₀₀ stripes are powered by a 12 VDC power supply and have a 3 year warranty.

DIMENSION [mm]

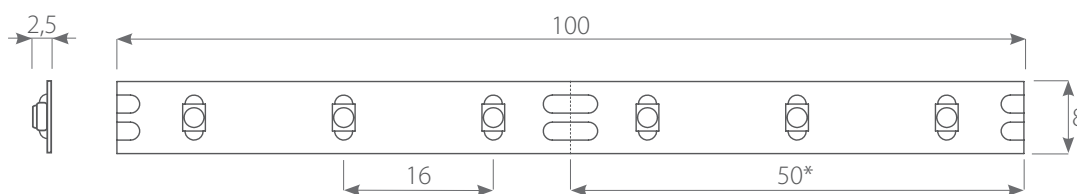

* dimension of the cutting
section

3M
VHB™

DC
12V

30 000h

CE

Distributor:
BAKALE lighting
www.bakale.pl




www.ledlink.pl
info@ledlink.pl

Type	LinkS ₃₀₀						
	W80K	W60K	W40K	W30K	R	G	B
Symbol	T120200	T120160	T120130	T120110	T120300	T120310	T120320
Color	white	white	white	white	red	green	blue
Voltage [V DC]	12	12	12	12	12	12	12
Current [mA/1m]	340 ~ 400	340 ~ 400	340 ~ 400	340 ~ 400	340 ~ 400	340 ~ 400	340 ~ 400
Power consumption [W]	4,8	4,8	4,8	4,8	4,8	4,8	4,8
Luminous flux [lm]	400	400	400	400	-	-	-
Light output [lm/W]	83	83	83	83	-	-	-
Beam angle [°]	120	120	120	120	120	120	120
Protection degree	IP20	IP20	IP20	IP20	IP20	IP20	IP20
Color temperature [K]	8000	6000	4000	3000	-	-	-
Wavelength [μm]	-	-	-	-	620	520	460
Operating temperature [°C]	-10 - +40	-10 - +40	-10 - +40	-10 - +40	-10 - +40	-10 - +40	-10 - +40
LEDs	SMD3528	SMD3528	SMD3528	SMD3528	SMD3528	SMD3528	SMD3528
LED quantity [pcs./m]	120	120	120	120	120	120	120
Partial [cm]	5	5	5	5	5	5	5
Lifetime [h]	30.000	30.000	30.000	30.000	30.000	30.000	30.000
Warranty [months]	36	36	36	36	36	36	36
Packing [m]	5	5	5	5	5	5	5

*option available on request: LinkS₃₀₀ Y (yellow - 590 μm) - T120330

CONSTRUCTION

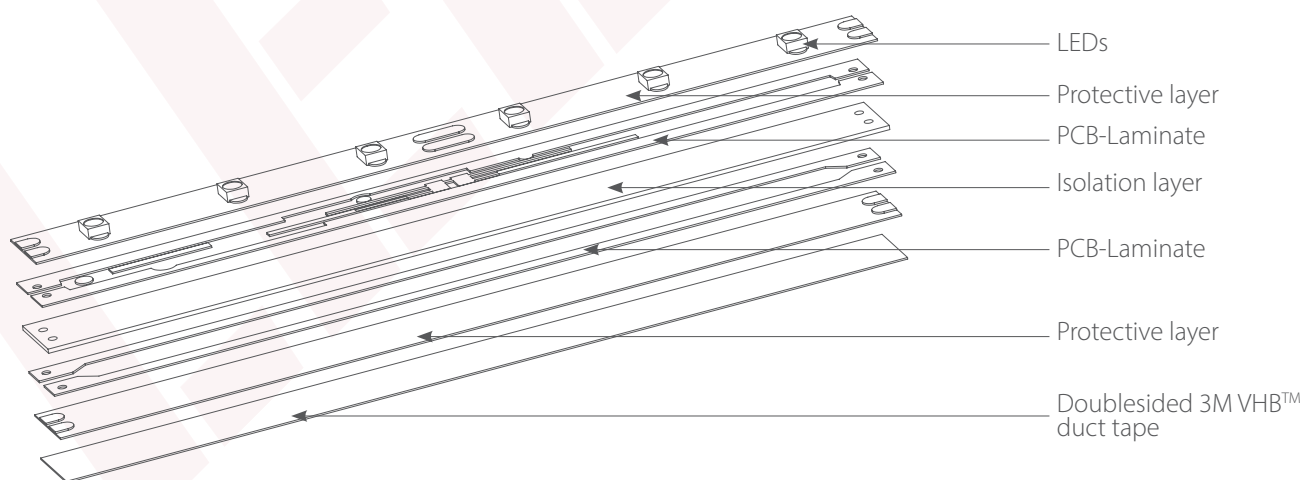

Supply method: The maximum length of the section fed in series is 5m.
On request, possible sections: 30m or 50m

