

LEDlink

LinkS600

LED STRIPES

8 mm width
efficiency 83lm/W
double-sided 3M VHB™ tape



FURNITURE
BACKLIGHT



ADVERTISING
SOLUTIONS



ARCHITECTURAL
BACKLIGHT




CUSTOM
APPLICATIONS

Typical applications: edge lighting in industry advertising | small spatial letters

LinkS₆₀₀ is a professional stripe with 600 diodes per 5m roll. It is ideally suited for illuminating light boxes, POS systems, furniture and interior elements. Thanks to the high number of diodes, the various projects can be illuminated very strongly and uniformly. Double-sided 3M VHB™ industrial adhesive tape on the back is used for assembly. The LinkS₆₀₀ stripes are powered by a 12 VDC power supply and have a 3 year warranty.

DIMENSION [mm]

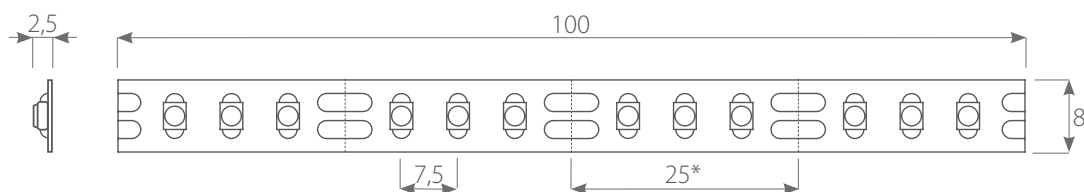

* dimension of the cutting
section

Distributor:
BAKALE lighting
www.bakale.pl



www.ledlink.pl
info@ledlink.pl

3M
VHB™

DC
12V


30 000h

CE

Type	LinkS ₆₀₀						
	W80K	W60K	W40K	W30K	R	G	B
Symbol	T130200	T130160	T130130	T130110	T130300	T130310	T130320
Color	white	white	white	white	red	green	blue
Voltage [V DC]	12	12	12	12	12	12	12
Current [mA/1m]	680 ~ 800	680 ~ 800	680 ~ 800	680 ~ 800	680 ~ 800	680 ~ 800	680 ~ 800
Power consumption [W]	9,6	9,6	9,6	9,6	9,6	9,6	9,6
Luminous flux [lm]	800	800	800	800	-	-	-
Light output [lm/W]	83	83	83	83	-	-	-
Beam angle [°]	120	120	120	120	120	120	120
Protection degree	IP20	IP20	IP20	IP20	IP20	IP20	IP20
Color temperature [K]	8000	6000	4000	3000	-	-	-
Wavelength [μm]	-	-	-	-	620	520	460
Operating temperature [°C]	-10 - +40	-10 - +40	-10 - +40	-10 - +40	-10 - +40	-10 - +40	-10 - +40
LEDs	SMD3528	SMD3528	SMD3528	SMD3528	SMD3528	SMD3528	SMD3528
LED quantity [pcs/m]	120	120	120	120	120	120	120
Partial [cm]	2,5	2,5	2,5	2,5	2,5	2,5	2,5
Lifetime [h]	30.000	30.000	30.000	30.000	30.000	30.000	30.000
Warranty [months]	36	36	36	36	36	36	36
Packing [m]	5	5	5	5	5	5	5

*option available on request: LinkS₆₀₀ Y (yellow - 590 μm) - T130330

CONSTRUCTION

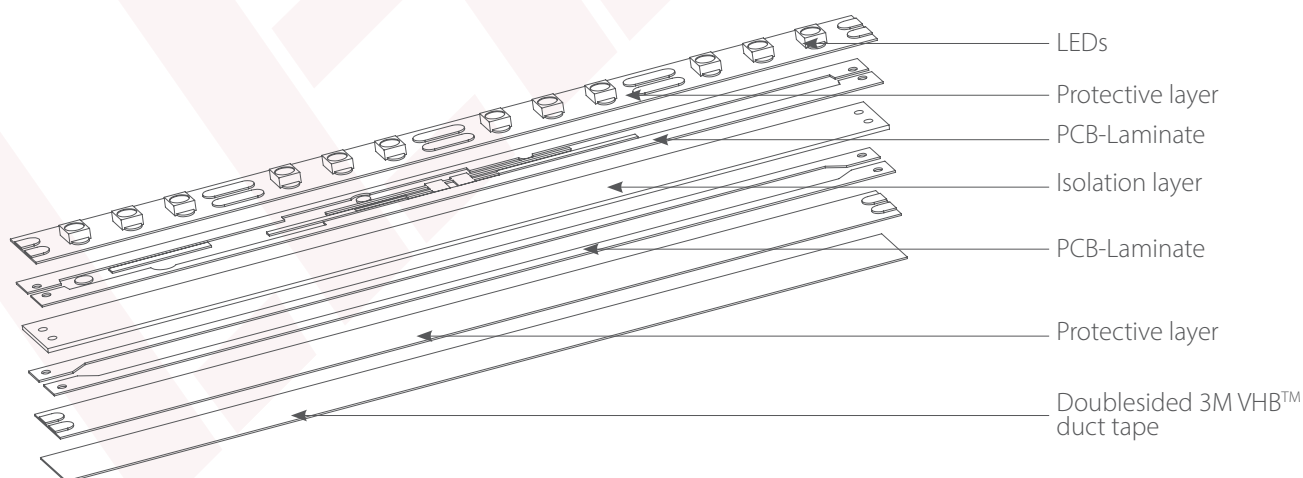

Supply method: The maximum length of the section fed in series is 5m.
On request, possible sections: 30m or 50m